

How-to Utilize an Apple® Device as a Mobile Hotspot

Article Number: 821 | Rating: Unrated | Last Updated: Wed, Feb 20, 2019 9:31 PM

Description:

Apple® products such as iPhones and iPads equipped with 4G capabilities may also be used as a mobile hotspot. Due to confusion on how to configure a microPod to an Apple® device's personal hotspot, this article will provide a step-by-step process on how-to:

- Configure the MicroPod to an Apple® device for the first time.
- Utilize an Apple® device as a mobile hotspot for road-testing.

Connecting to an Apple® Device for The First Time:

Please use the following instructions if your microPod has not been configured to your Apple® device's Personal Hotspot.

If the microPod has not been configured to any wireless network, please review the following article and configure the microPod to your dealership's wireless first - [How-to Configure a Wireless Profile on a microPOD 2](#)

1. Unlock the Apple® device.
2. Go to **settings**.
3. Go to **Personal Hotspot**.

Settings

Search



Sign in to your iPhone

Set up iCloud, the App Store, and more.

 Airplane Mode

 Wi-Fi Off >

 Bluetooth On >

 Cellular >

 Personal Hotspot >

 Notifications >

 Control Center >

 Do Not Disturb >

Important: If you do not see an option for "Personal Hotspot", then your device is not setup to utilize a built in personal hotspot. Please contact your device's carrier to see if this feature can be enabled.

4. Turn the Personal Hotspot ON.

USERS MUST REMAIN ON THIS SCREEN IN ORDER FOR THE WIRELESS NETWORK TO CONTINUE TO BROADCAST. NAVIGATING AWAY FROM THE SCREEN WILL STOP THE NETWORK FROM BROADCASTING - THUS, PREVENTING ANY DEVICES FROM CONNECTING TO THE APPLE® DEVICE.

Personal Hotspot



Now Discoverable.

Other users can look for your shared network using Bluetooth under the name "WiTECH".

Wi-Fi Password

CHRYSLER >



TO CONNECT USING WI-FI

- 1 Choose "WiTECH" from the Wi-Fi settings on your computer or other device.
- 2 Enter the password when prompted.

2.0



TO CONNECT USING BLUETOOTH

- 1 Pair iPhone with your computer.
- 2 On iPhone, tap Pair or enter the code displayed on your computer.
- 3 Connect to iPhone from computer.



TO CONNECT USING USB


- 1 Plug iPhone into your computer.
- 2 Choose iPhone from the list of network services in your settings.

Important: Once the Personal Hotspot has been enabled, your device that will begin to broadcast a wireless network.


5. Power up the microPod by connecting it to a vehicle or via the USB cord.

6. Log into wiTECH 2.0.


7. Launch the Device Manager page from the discovery screen.

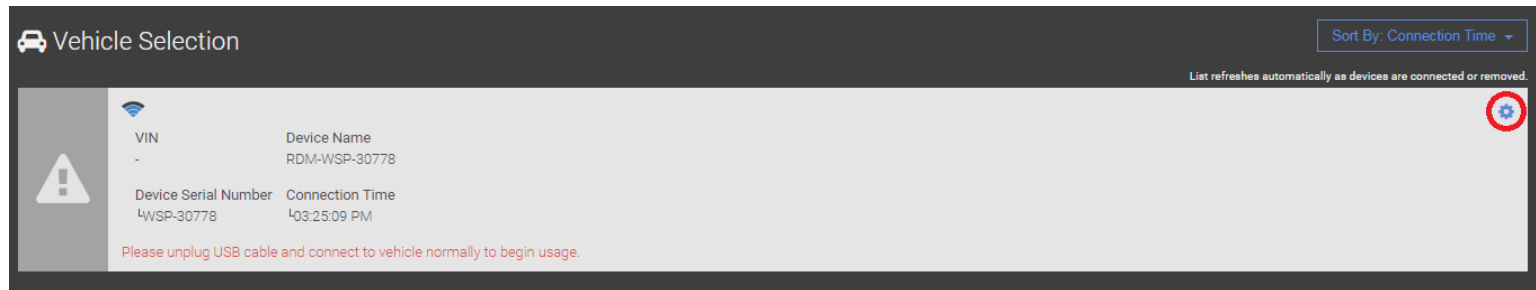

8. Select the **Network** drop-down and select your Personal Hotspot network.

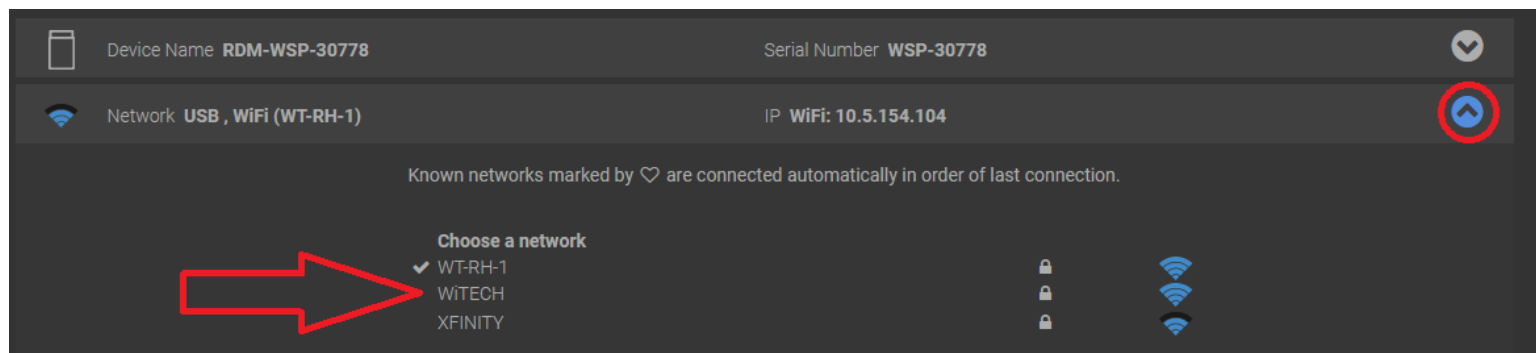

9. Enter the network password and select **Connect**.

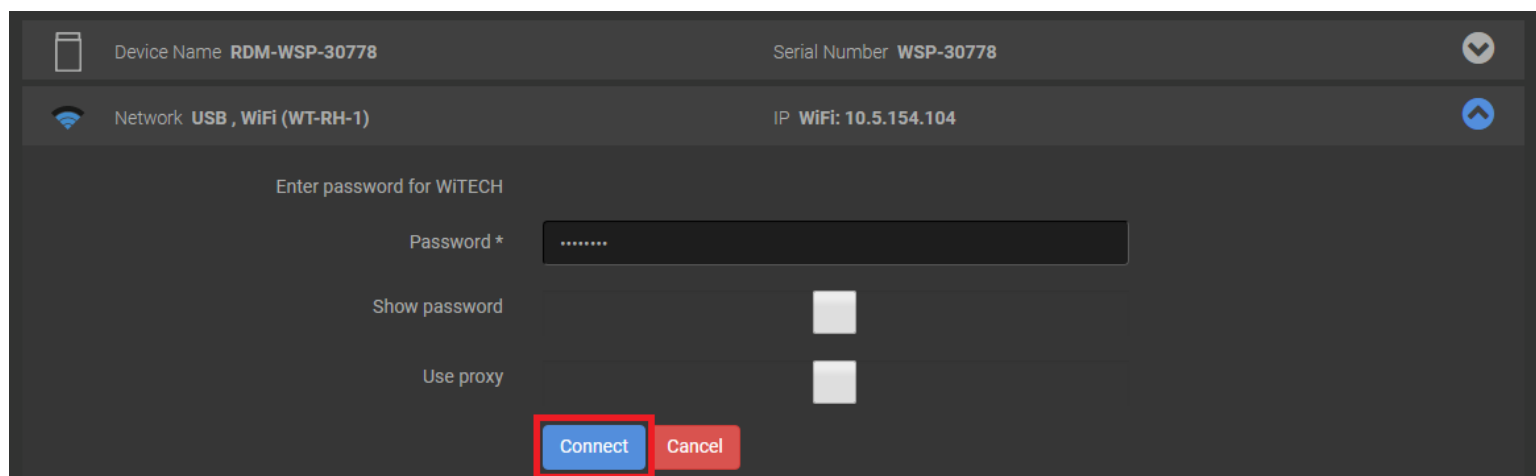

10. Once the device connects to the Personal Hotspot, the device will indicate a connection via a **blue banner** at the top. When this banner appears, users can navigate away from the Personal Hotspot menu.



Using an Apple® Device for Road Testing:

Please use the following instructions if your microPod has already connected to your Apple® device's Personal Hotspot and would like to utilize it for road-testing.

1. Unlock the Apple® device.
2. Go to **settings**.
3. Go to **Personal Hotspot**.
4. Turn the Personal Hotspot **ON**.

USERS MUST REMAIN ON THIS SCREEN IN ORDER FOR THE WIRELESS NETWORK TO CONTINUE TO BROADCAST. NAVIGATING AWAY FROM THE SCREEN WILL STOP THE NETWORK FROM BROADCASTING - THUS PREVENTING ANY DEVICES FROM CONNECTING TO THE APPLE® DEVICE.

5. Connect the microPod to the vehicle and place the Apple® device in the vehicle.
6. Drive the vehicle out of the shop and out of range from the Dealership's Network.
7. Once the device connects to the Personal Hotspot, the device will indicate a connection via a **blue banner** at the top. When this banner appears, users can navigate away from the Personal Hotspot menu.

Note: If you are also utilizing your Apple® device for wiTECH 2.0, at this point you can go into your browser and log into wiTECH 2.0.

8. When returning to the dealership, disable the Personal Hotspot once within range of the Dealership's Network. The microPod will automatically reconnect to the dealership's network.

For more information on road-testing, please view our road-testing Youtube video - [Video - How-to use wiTECH 2.0 on a Road Test / Hotspot](#)

Posted : Ryan Clauson - Thu, Feb 1, 2018 9:27 PM. This article has been viewed 5359 times.

Online URL: <https://kb.fcawitech.com/article/how-to-utilize-an-apple%c2%ae-device-as-a-mobile-hotspot-821.html>