


# How-to Flash with Enhanced DRB III Emulator

552 Chris Ordner Tue, Jul 9, 2019 [Enhanced DRB III Emulator](#), [TechTOOLS](#) 10897

1. Open the latest version of TechTOOLS
2. Search by VIN or YME
3. Select the "DRB III Emulator" checkbox
4. Select the desired flash
5. Select "Download / Update"

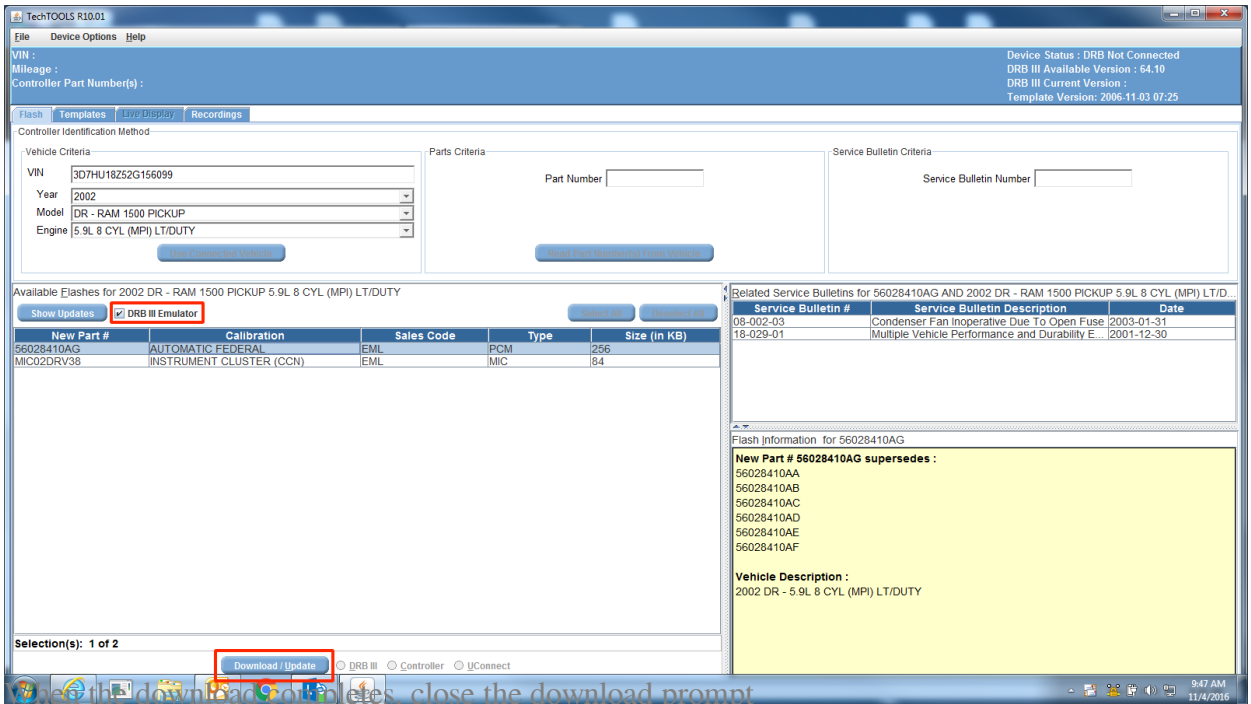

6. Click the download control, close the download prompt
7. On the same computer, launch the Enhanced DRB III Emulator from the wiTECH application

17:04:27

### Connection Wizard

**Select Tool**

Double-click row or select tool and press "Next". List refreshes automatically as tools are added or removed.

Hide Unresponsive Devices


Device	Year	Body	IP Address	Workgroup	Interface	Locked	Lock Owner
RDH-WSP-08805	2011	LX	10.5.155.177		Wi-Fi		
RDH-WSP-18186	2013	FF	10.5.155.158		Wi-Fi		
wTECH 1.0 microPod	????	??	10.5.155.156		Wi-Fi		
wTECH 1.0 microPod	????	??	172.22.22.22		usb		
Simulated-2004.HB	2004	HB	2004.HB				
Simulated-2005.WK	2005	WK	2005.WK				
Simulated-2006.DR	2006	DR	2006.DR				
Simulated-2006.HB	2006	HB	2006.HB				
Simulated-2006.KJ	2006	KJ	2006.KJ				
Simulated-2006.LX	2006	LX	2006.LX				
Simulated-2006.WK	2006	WK	2006.WK				
Simulated-2007.CS	2007	CS	2007.CS				
Simulated-2007.VB	2007	VB	2007.VB				
Simulated-2007.ZH	2007	ZH	2007.ZH				
Simulated-2008.RT	2008	RT	2008.RT				
Simulated-2008.ZB	2008	ZB	2008.ZB				
Simulated-2009.HB	2009	HB	2009.HB				
Simulated-2009.JC	2009	JC	2009.JC				
Simulated-2010.PH	2010	PH	2010.PH				
Simulated-2011.DP	2011	DP	2011.DP				
Simulated-2011.LX	2011	LX	2011.LX				
Simulated-2012.FF	2012	FF	2012.FF				

Work in standalone mode

Modify Location Profiles

Launch DRB III Enhanced Next

8.

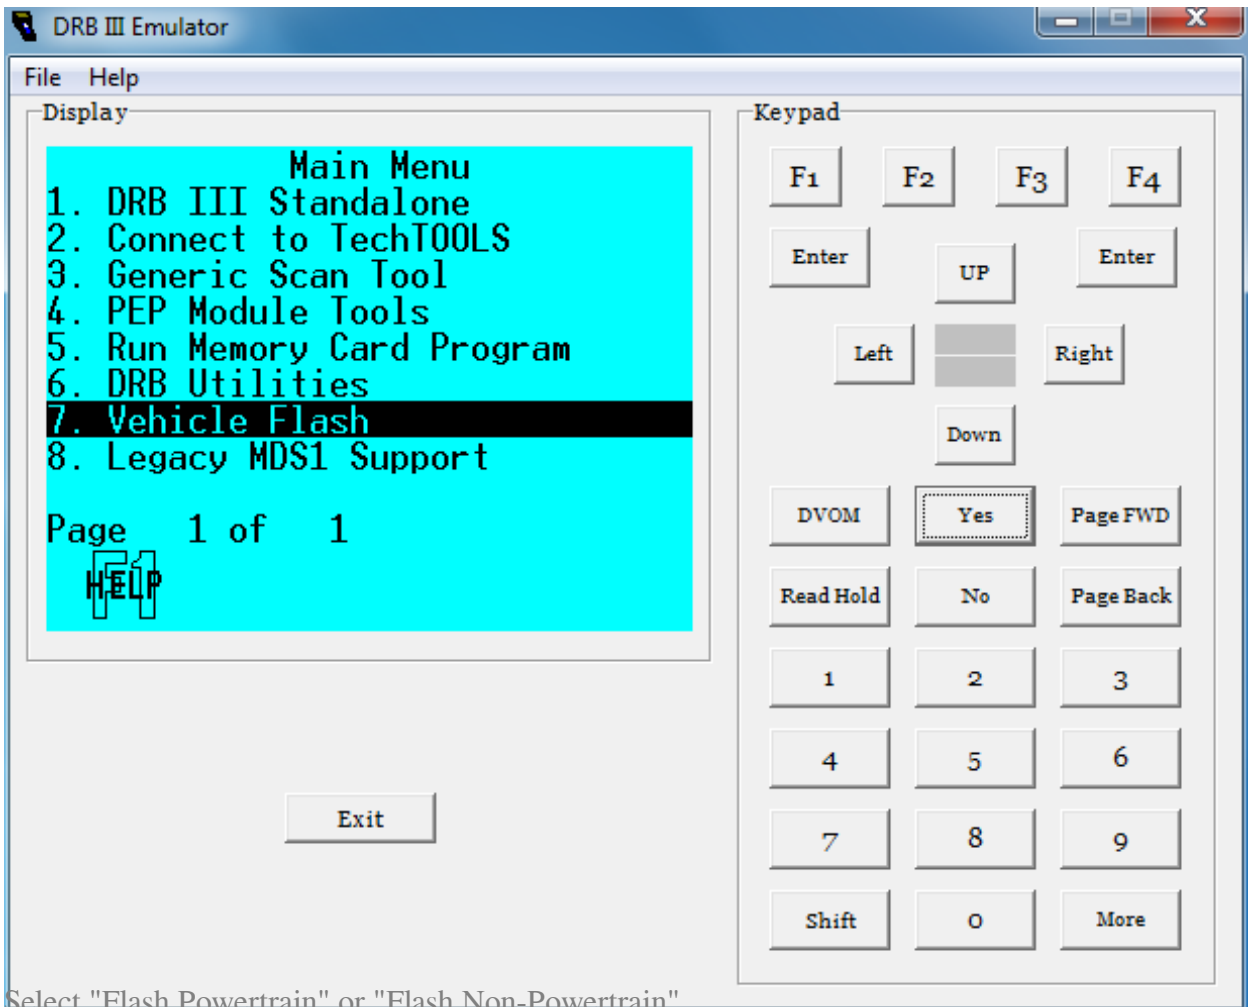

9. Select "Flash Powertrain" or "Flash Non-Powertrain"
10. Select "Start"

